



remont i prodaja opreme za kotlarnice Baždarenje ventila sigurnosti

Termoenergetik plus d.o.o. Zage Malivuk 65b, 11210 Krnjača Beograd PIB:SR103759831

t/f 011/2-993-992, 33-17-177, 065/34-30-627

termoenergetik@gmail.com


160-161458-23

170-30005764000-54

www.termoenergetik.com

HVATAČ NEČISTOĆE

Radni fluid: voda, para i neutralni gasovi.
Ugradne mere prema JUS MC5,005-F1 (DIN3202-F1)
Priključne mere prema JUS M,B6,064(DIN 2544)

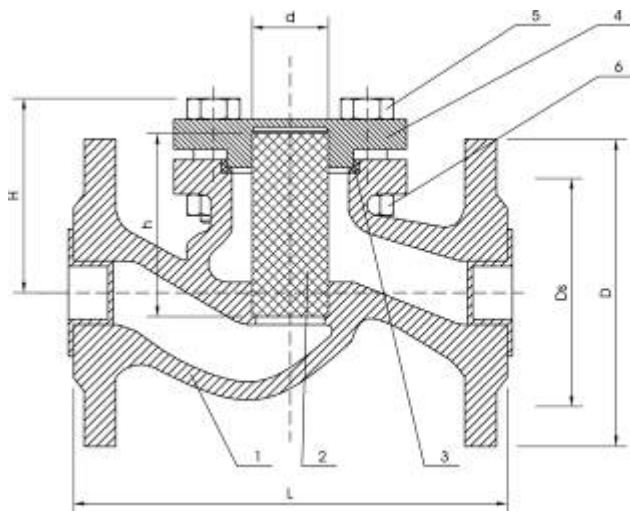

- 1) Kućište
- 2) Sito
- 3) Zaptivač
- 4) Poklopac
- 5) Vijak
- 6) Navrtka

NP25/40 bara Č1330 (GS-C25)

Radna temperatura do 400°C

DN mm	L mm	D mm	Ds mm	D1 mm	n x d	Težina kg
NO15	130	95	65	45	4 x 14	2,50
NO20	150	105	75	58	4 x 14	3,00
NO25	160	115	85	68	4 x 14	4,00
NO32	180	140	100	78	4 x 18	5,00
NO40	200	150	110	88	4 x 18	6,50
NO50	230	165	125	102	4 x 18	8,80
NO65	290	185	145	122	8 x 18	12,50
NO80	310	200	160	138	8 x 18	20,00
NO100	350	235	190	162	8 x 22	28,00
NO125	400	270	220	188	8 x 26	45,00
NO150	480	300	250	218	8 x 26	68,00
NO200	600	360/375	310/320	278/285	12 x 27/30	
NO250	730	425/460	370/385	335/345	12 x 30/33	