



## remont i prodaja opreme za kotlarnice Baždarenje ventila sigurnosti

Termoenergetik plus d.o.o. Zage Malivuk 65b, 11210 Krnjača Beograd PIB:SR103759831

t/f 011/2-993-992, 33-17-177, 065/34-30-627

termoenergetik@gmail.com


160-161458-23

170-30005764000-54

www.termoenergetik.com

### RAVNI ODBOJNI VENTILI

Radni fluid: voda, para i neutralni gasovi.  
Ugradne mere prema JUS MC5,005-F1 (DIN3202-F1)  
Priključne mere prema JUS M,B6,064(DIN 2544)

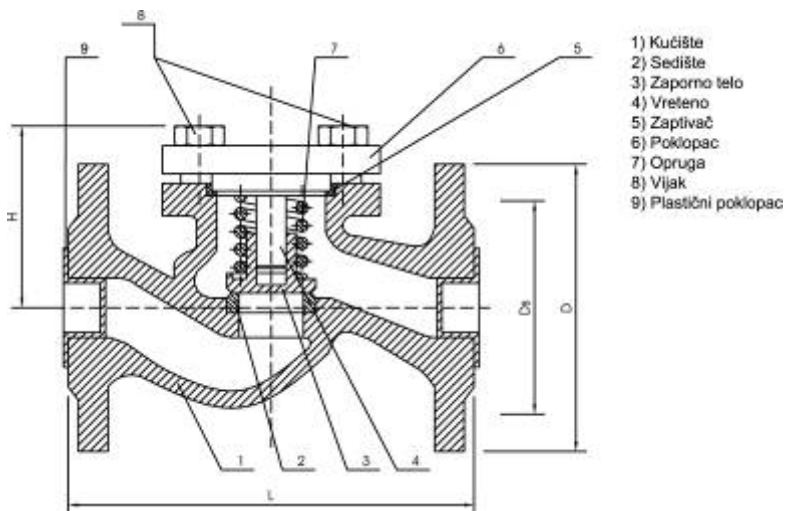

NP16 bara SL25

Radna temperatura: max 225°C

| DN<br>mm | L<br>mm | D<br>mm | Ds<br>mm | D1<br>mm | n x d   | Težina<br>kg |
|----------|---------|---------|----------|----------|---------|--------------|
| NO15     | 130     | 95      | 65       | 45       | 4 x 14  | 2,50         |
| NO20     | 150     | 105     | 75       | 58       | 4 x 14  | 3,00         |
| NO25     | 160     | 115     | 85       | 68       | 4 x 14  | 3,60         |
| NO32     | 180     | 140     | 100      | 78       | 4 x 18  | 5,00         |
| NO40     | 200     | 150     | 110      | 88       | 4 x 18  | 6,00         |
| NO50     | 230     | 165     | 125      | 102      | 4 x 18  | 10,00        |
| NO65     | 290     | 185     | 145      | 122      | 4 x 18  | 15,00        |
| NO80     | 310     | 200     | 160      | 138      | 8 x 18  | 20,00        |
| NO100    | 350     | 220     | 180      | 158      | 8 x 18  | 38,00        |
| NO125    | 400     | 250     | 210      | 188      | 8 x 18  | 42,00        |
| NO150    | 480     | 285     | 240      | 212      | 8 x 23  | 74,00        |
| NO200    | 600     | 340     | 295      | 242      | 12 x 23 | 119,00       |
| NO250    | 730     | 405     | 355      | 268      | 12 x 27 | 218,00       |