



## remont i prodaja opreme za kotlarnice Baždarenje ventila sigurnosti

Termoenergetik plus d.o.o. Zage Malivuk 65b, 11210 Krnjača Beograd PIB:SR103759831

t/f 011/2-993-992, 33-17-177, 065/34-30-627

termoenergetik@gmail.com


160-161458-23

170-30005764000-54

www.termoenergetik.com

### RAVNI ZAPORNI VENTILI

Radni fluid: voda, para i neutralni gasovi.  
Ugradne mere prema JUS MC5,005-F1 (DIN3202-F1)  
Priključne mere prema JUS M,B6,064(DIN 2544)

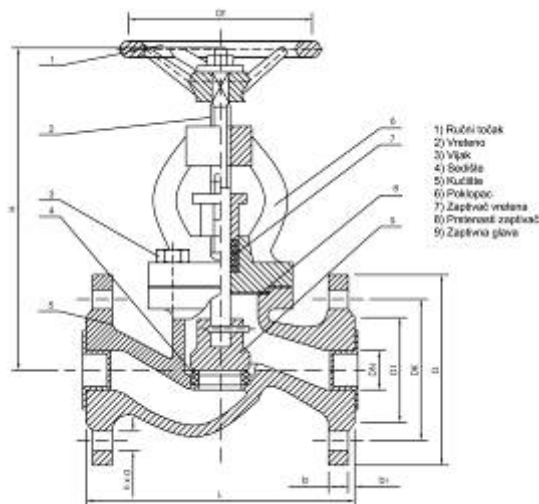

**NP25/40** bara Č1330 (GS-C25)

Radna temperatura do 400°C

DN mm	L mm	D mm	Dk mm	D1 mm	n x d	Težina kg
NO15	130	95	65	45	4 x 14	4,70
NO20	150	105	75	58	4 x 14	5,40
NO25	160	115	85	68	4 x 14	6,20
NO32	180	140	100	78	4 x 18	9,50
NO40	200	150	110	88	4 x 18	11,20
NO50	230	165	125	102	4 x 18	15,00
NO65	290	185	145	122	8 x 18	21,00
NO80	310	200	160	138	8 x 18	34,00
NO100	350	235	190	162	8 x 22	49,00
NO125	400	270	220	188	8 x 26	70,00
NO150	480	300	250	218	8 x 26	96,00
NO200	600	360/375	310/320	278/285	12 x 27/30	
NO250	730	425/460	370/385	335/345	12 x 30/33	